



SM5X0 SERIES

ASETEK 92mm AIO MOUNT

ASSEMBLY GUIDE

ASSEMBLE THE AIO

Pictured below is the recommend fan mounting and tube configuration for the ASETEK 92mm AIO for our SM5X0 series cases.



Note the orientation of the tubes, fan, and fan wire.



NOTE: Sliger does **NOT** include the screws for attaching the fan to the radiator. We recommend 4x .750" long 6-32 Phillips #2 flat head screws.

“INSTALL” REAR FAN


Your secondary fan (or 4x SSD / 3.5” HDD bracket) must be positioned before installing the AIO. **DO NOT SCREW IT INTO POSITION.** (yet)

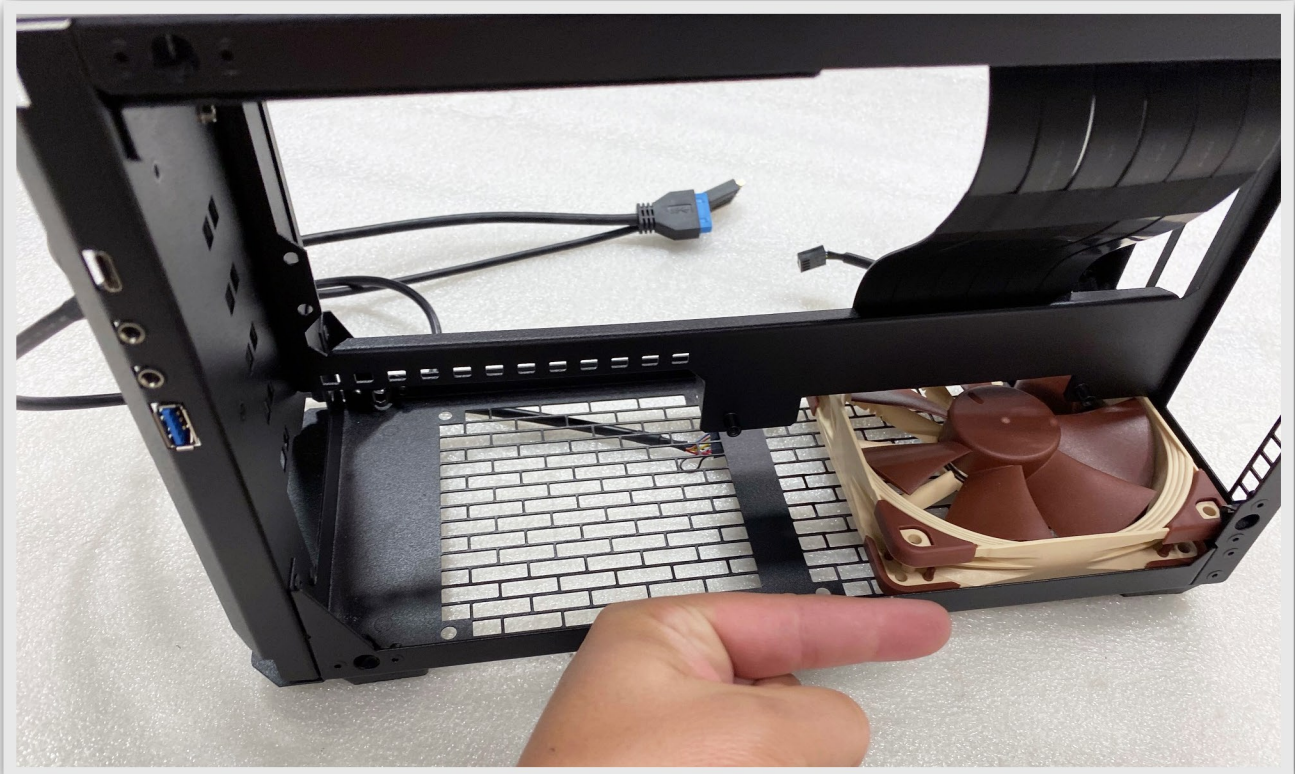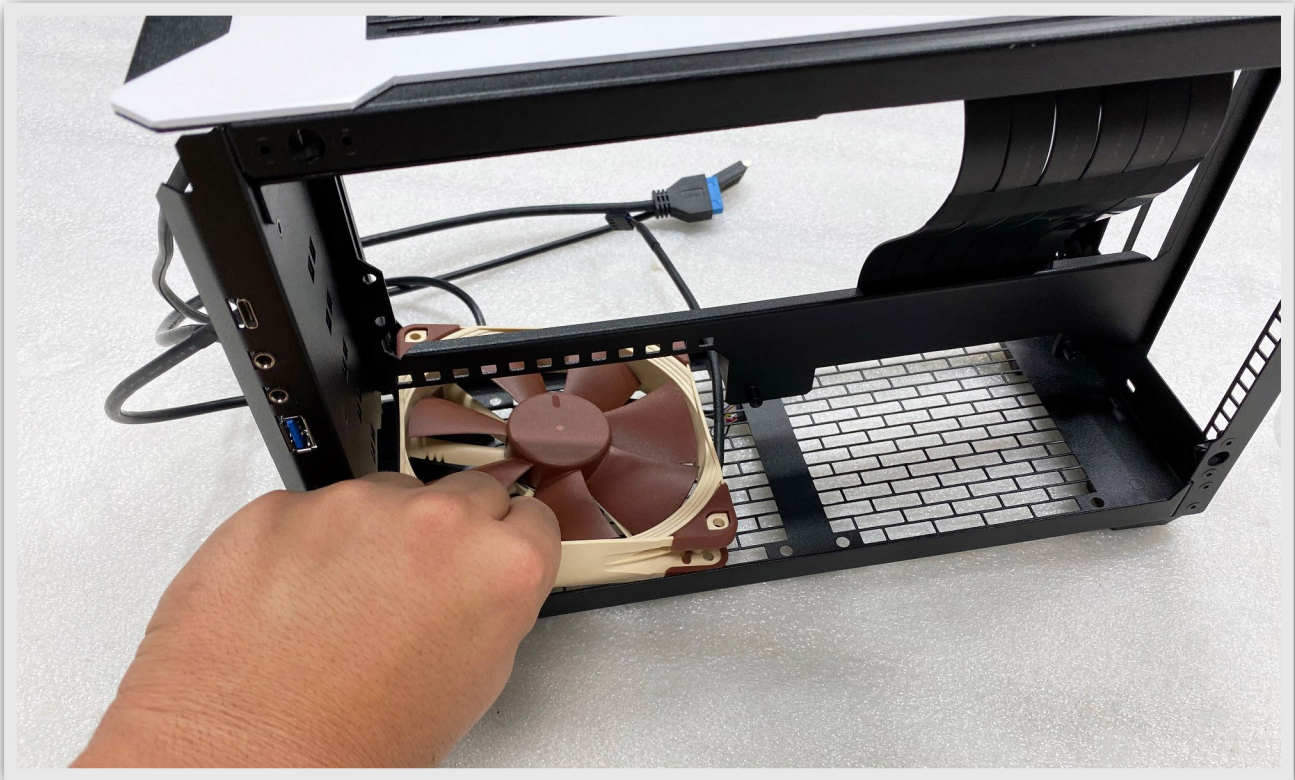

ATTACH AIO BRACKET

Attach the AIO bracket to the radiator so the hoses are towards the GPU side of the case, and the two mount hardware are towards the rear of case.


NOTE: the 4x screws used for bottom of AIO are 1/4" 6-32 PFH #2 black.

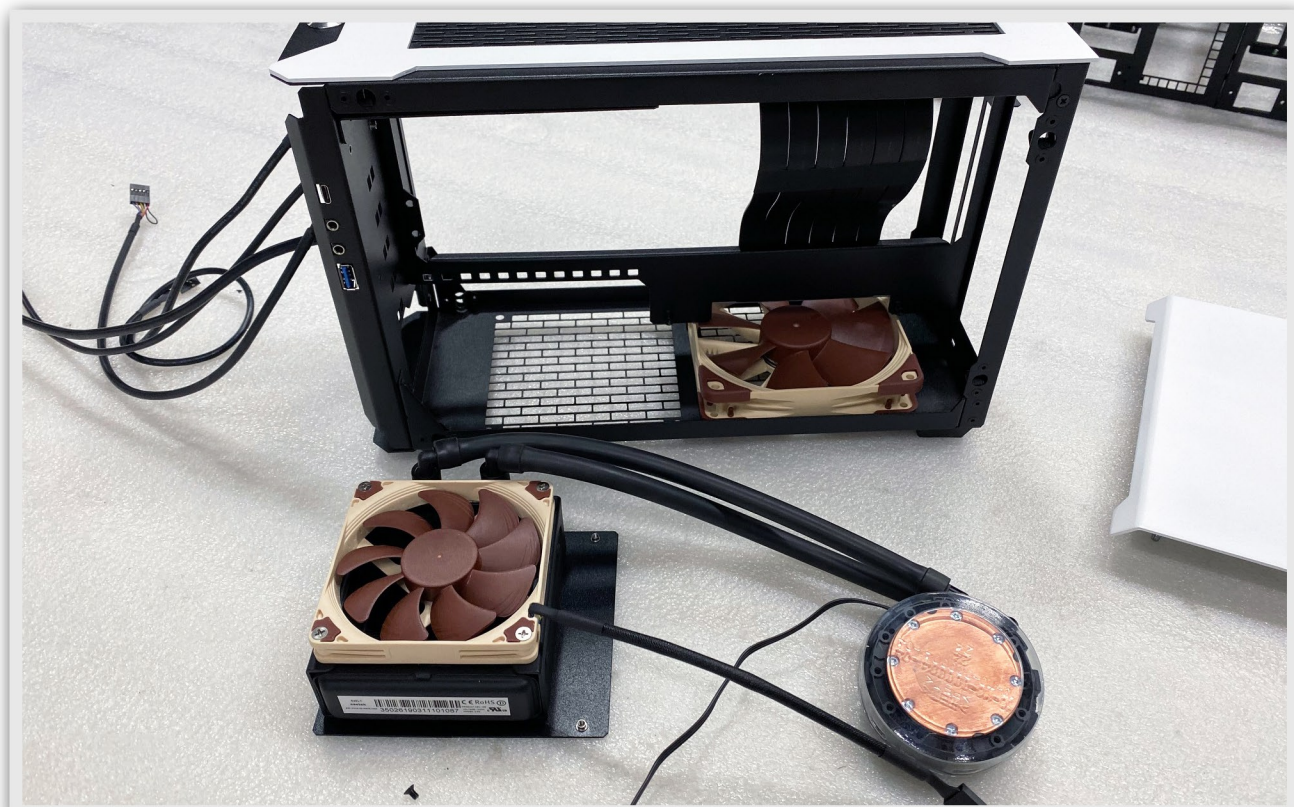

INSERT ASSEMBLY


From the motherboard side insert the assembly at an approximate 45 degree angle to tuck radiator right angle hose connectors under the center spine.

The rest of the assembly should then be able to slide straight in.

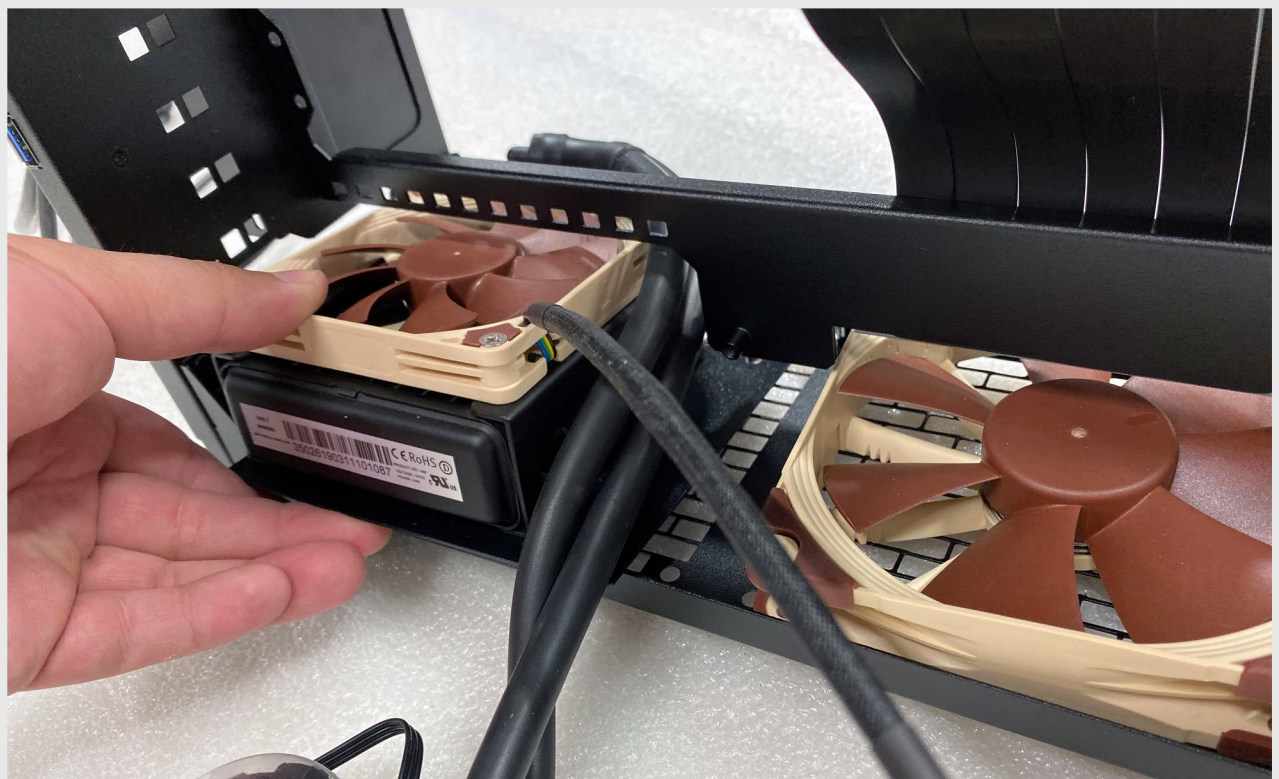

CHECK CLEARANCE

The below image illustrates where the tubes should be resting once the radiator is successfully placed. This position prevents any kinks in AIO hoses.

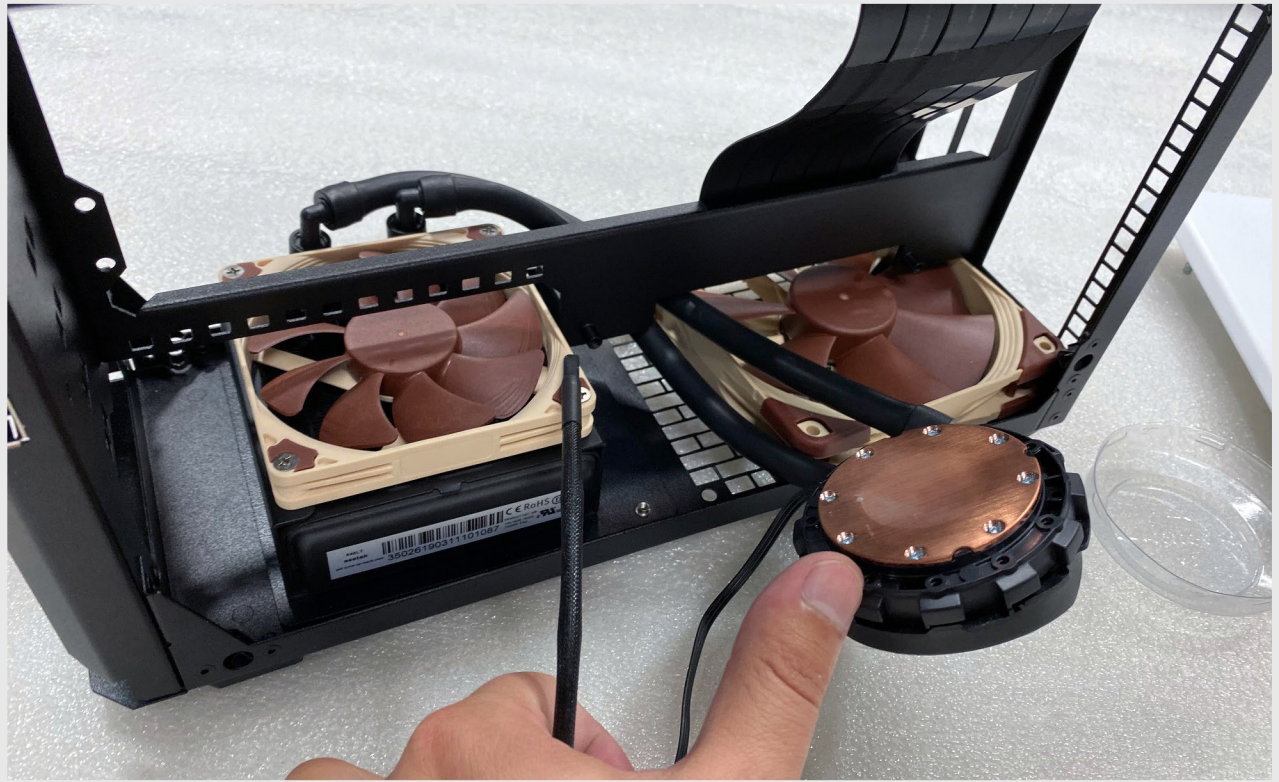

TIME TO SCREW

Install the AIO bracket with the 2x M3 Flat Head screws provided with the AIO bracket. Your 120mm fan can then be screwed into position.

